



Public Works

LOS ANGELES COUNTY

Maintenance District 1 **Hacienda Heights Community – Walbrook Drive, et al.**

- **Project Scope:**

The primary objective of this project is to preserve 8.5 miles of residential roads. The project includes the following proposed work:

- Pavement prep-work
- Parkway improvements
- Curb ramps upgrades
- Pavement preservation

- **Project Benefits:**

The proposed work includes micro-milling to improve road ride-ability; scrub seal to seal cracks; and slurry seal to preserve the pavement and provide a smoother, more finished driving surface. The preservation is estimated to extend the pavement life for an additional 6 to 8 years. To better care for the environment, all aggregates (tiny rocks) used come from recycled pavement. Needed sidewalk, curb, and gutter repair as well as installation of curb ramps will also be performed.

- **Project Location:** Various roadways within the Unincorporated Community of Hacienda Heights.

- **Community Outreach:**

A project information flyer and a construction brochure will be provided just after the project has been awarded and a week prior to start of construction, respectively.

- **Cost Estimate:**

- Total Project: \$2.3 Million
- Construction: \$1.1 Million

- **Economic Impact:** Project construction supports 13 direct and indirect jobs.


- **Tentative Milestone Schedule:**

- June 2017 - Parkway improvement and pavement prep work completed
- April 30, 2018 - Project Design Concept and Plans Approved
- May 21, 2018 - Start of pavement preservation work



Public Works

LOS ANGELES COUNTY

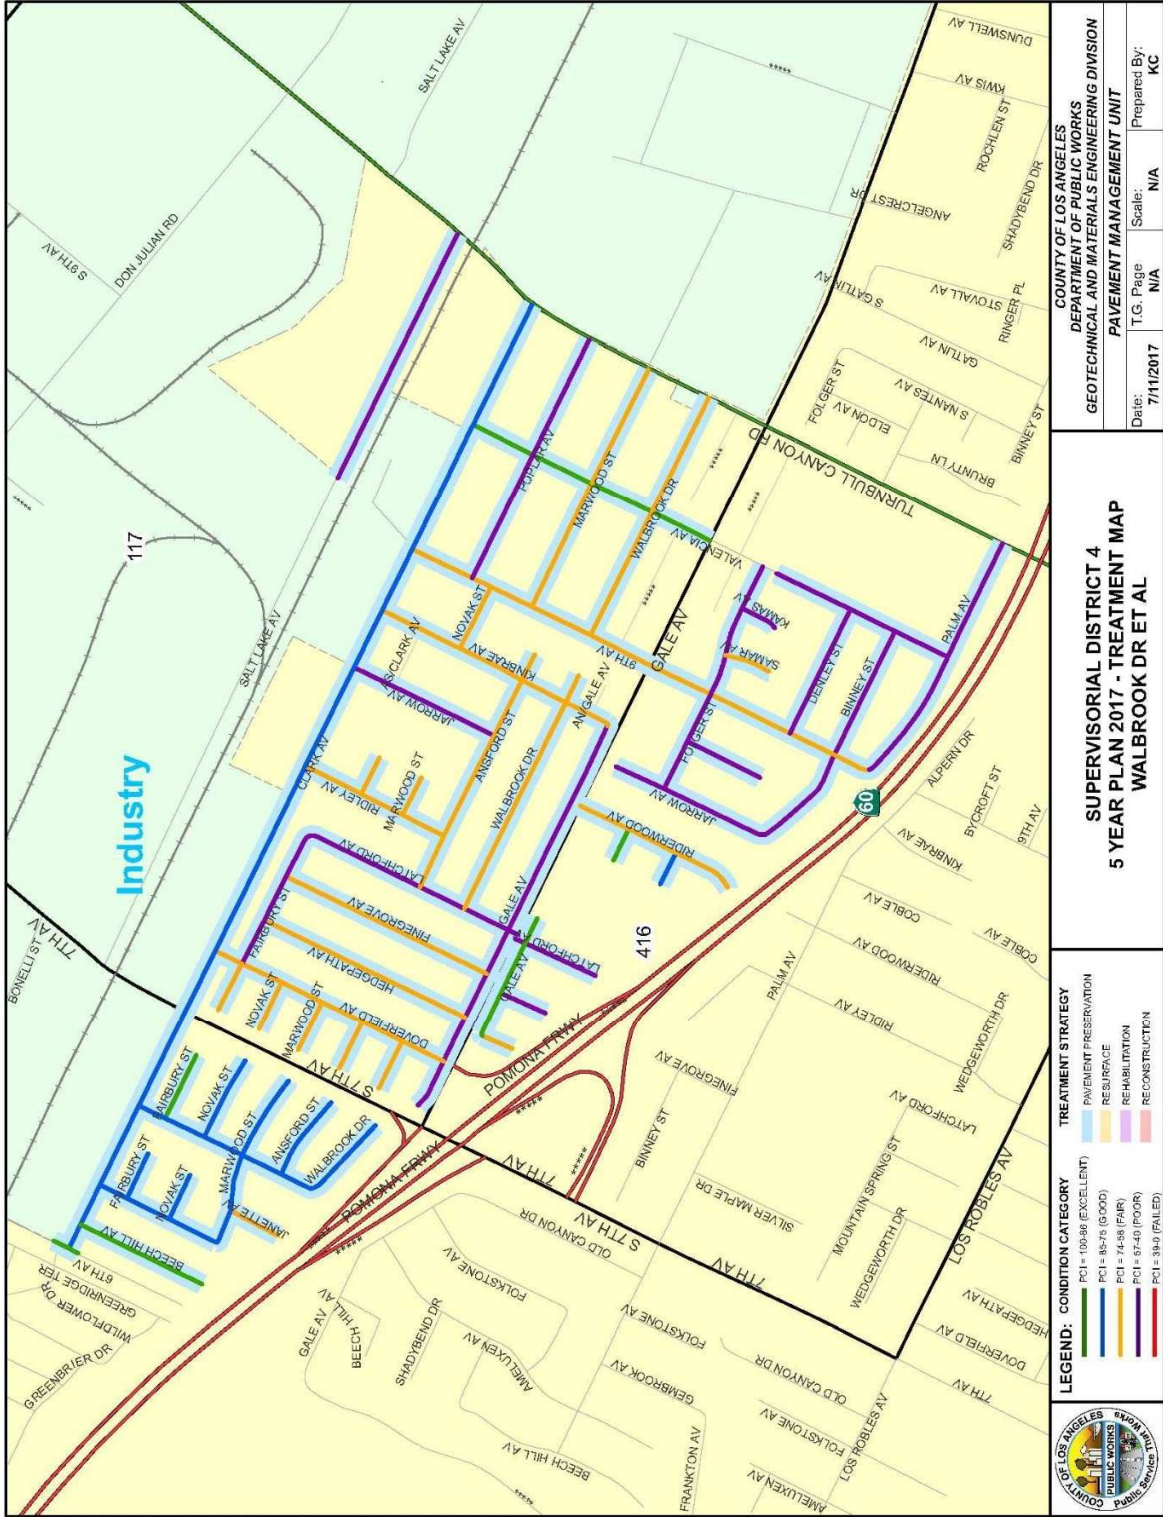

Path: P:\gmapub\PAVEMENT MANAGEMENT\10-YEAR PLAN 2017\WALBROOK DR ET AL.mxd

	LEGEND:	
	CONDITION CATEGORY PCI = 100-86 (EXCELLENT) PCI = 85-75 (GOOD) PCI = 74-68 (FAIR) PCI = 67-40 (POOR) PCI = 30-0 (FAILED)	TREATMENT STRATEGY Pavement Preservation Resurfacing Rehabilitation Reconstruction
SUPERVISORIAL DISTRICT 4 5 YEAR PLAN 2017 - TREATMENT MAP WALBROOK DR ET AL		
COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS GEOTECHNICAL AND MATERIALS ENGINEERING DIVISION PAVEMENT MANAGEMENT UNIT		
Date: 7/11/2017	T.G. Page: N/A	Scale: N/A
Prepared By: KC		